



INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

**PRIORITY  
 DOCUMENT**  
 SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 23 JUL 2004


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

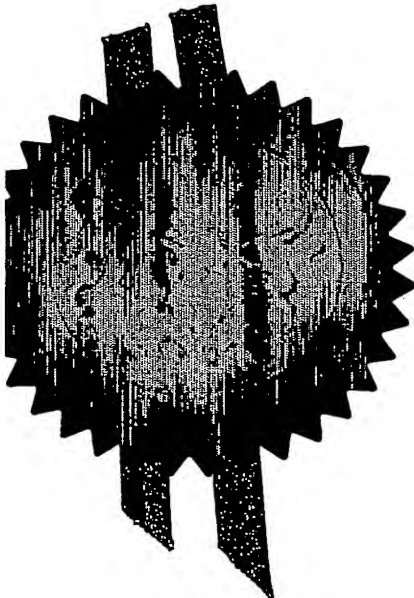

Signed

Dated 6 July 2004

**PRIORITY DOCUMENT**  
 SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH  
 RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

Patents Act 1977  
(Rule 1)

The  
Patent  
Office

THE PATENT OFFICE

L

20 JUN 2003

NEWPORT

1/77  
20 JUN 03 0816675/1 002776  
P01/7760 0.00-0314422.7

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	IP/P7227		
2. Patent application number (The Patent Office will fill in this part)	0314422.7		20 JUN 2003
3. Full name, address and postcode of the or of each applicant (underline all surnames)	QINETIQ LIMITED  Registered Office 85 Buckingham Gate London SW1E 6PD United Kingdom  Patents ADP number (if you know it)  If the applicant is a corporate body, give the country/state of its incorporation		
	GB 818 385 7005		
4. Title of the invention	Image Processing System		
5. Name of your agent (if you have one)	Bowdery Anthony Oliver		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	QINETIQ LIMITED IP Formalities A4 Bldg Cody Technology Park Ively Road Farnborough Hants GU14 0LX United Kingdom		
Patents ADP number (if you know it)	818 387 3001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number or earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:			
a) any applicant named in part 3 is not an inventor, or			
b) there is an inventor who is not named as an applicant, or	Yes (b)		
c) any named applicant is a corporate body.			
See note (d))			

Enter the number of sheets for any of the following items you are filing with this form.  
Don't count copies of the same document

Continuation sheets of this form 0

Description 7

Claim(s) 2

Abstract 1

Drawing(s) 10

3. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 1 + 2 copies

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 0

Any other documents 0  
(please specify)

4. I / We request the grant of a patent on the basis of this application.

Signature

*P Davies*  
P Davies

Date 18 June 2003

Name and daytime telephone number of person to contact in the United Kingdom

Mrs Linda Bruckshaw  
01252 392722

#### Warning

Where an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have attached 'Yes' *Patents Form 7/77* will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

Image Processing System

The invention relates to an image processing system in which a linear array of detectors is swept over a scene to provide a two dimensional display.

5

Background.

Examples of these systems are in thermal imaging where a parallel array of detectors is scanned across a scene by rotating prisms and/or flapping mirrors. Usually these  
10 detectors are also given a vertical scan, and the resultant display is formed of a plurality of banded scans. One use of imaging systems is in traffic monitoring. For example checking on the number and type of vehicles passing onto a bridge, toll road, or city centre congestion monitoring. One example is described in GB 2154388, where a single fixed vertically arranged linear array of detectors monitors vehicles  
15 passing through the detectors field of view. Movement of the vehicles provides a horizontal scanning giving a two dimensional image that can be stored or transmitted to a remote location.

The above example has its limitations; it does not distinguish between opposite  
20 directions of movements and can not give information about movement away from the sensors.

This limitation is overcome, according to this invention, by the use of a plurality of  
25 vertically arranged detector arrays and comparison of signals received from each array.

According to this invention an image processing system includes a linear array of detectors imaged onto a scene of interest and a signal processor for storing an image received by the linear array when a detected object passes through the scene;

5 characterised by:

a plurality of linear arrays spaced substantially parallel to one another to image a plurality of areas of interest in a scene; and

10 signal processing for detecting images received by the plurality of arrays and determining direction and speed of movement detected.

Additionally the system may detect size, type, and movement towards or away from the detector arrays.

15

The detectors may be sensitive in the infra red (IR), microwave (including mm wave devices), or visible wavebands, operating with ambient or artificial illumination. In some application a combination of IR and visible detectors may be used. The IR detectors may be uncooled resistance bolometer or pyroelectric detectors.

20

Preferably each detector in the linear array has an associated amplifier and filter.

Several systems may be combined into a single unit and arranged to give 360° azimuthal coverage.

25

For most application the linear arrays will be arranged vertically, and movement of a target is horizontal through the scene. However, these are optimum relative conditions and the array alignment and target movement may depart substantially from these. It is however necessary that the target movement has a component

30 orthogonal to a linear arrays alignment direction.

---

Brief description of drawings.

The invention will now be described, by way of example only, with reference to the accompanying drawings in which: -

5

Figure 1 is a schematic view of a single vertical detector array monitoring traffic along a road;

10

Figure 2 is a view of both a two-dimensional array with amplifiers, and four vertical linear detector arrays with a separate amplifier associated with each detector element;

15

Figure 3 is a schematic view of a multiple linear detector array and lens formed by four arrays;

Figure 4 is a plan view of a four array system and shows images of a vehicle moving through four detector array fields and away from the detectors, thus the images get smaller on successive detections;

20

Figure 5 is a block diagram of a processor for processing of the detector arrays;

Figure 6 is a view of four vertical linear arrays arranged in pairs;

25

Figure 7 is a view of two pairs of vertical linear arrays used to trigger an additional two-dimensional array of detectors;

Figure 8 is a plan view showing four separate arrays of four vertical linear arrays for providing 360° azimuthal detection;

30

Figure 9 is a flow chart showing an algorithm for the processing of a single linear array; and

Figure 10 is a flow chart showing an algorithm for processing for automatic target validation.

35

Description of embodiments.

Figure 1 shows the principles involved in a single vertical detector array 1 monitoring vehicles 2 movement along a road 3. The vertical array 1 receives an image 4 via a lens 5; typically the number of detectors in an array is 64 in a range of 32 to 128 or more. The image 4 is a thin strip 4 of detail from the vehicles 2 moving along the road 3. Successive images 4 are fed into memory 6 of a processor 9 for processing. The width of the stored image from a single vertical array 1 is dependent upon the speed of the vehicle 2 along the road and sampling speed of the array 1, typically between 5 and 50 times a second. Without vehicle movement no image is recorded if the detectors are pyroelectric detectors; such components measure temperature changes only (i.e. A.C. coupled), not steady state temperatures. Other forms of detectors, e.g. photodiodes or resistance bolometers respond to a steady-state input (i.e. D.C. Coupled).

Figure 2 shows four vertically arranged linear arrays manufactured in a sparse manner on a substrate 8 with room between each array for a column of electronic filters and amplifiers, with one amplifier and filter for every detector element. Readout electrodes 10 enable the output from each detector element to read out sequentially in a multiplexed manner. In comparison, a 2-d close packed array 11 is also shown with a set of amplifiers and filters 12.

The linear array 1 format has a distinct advantage over two-dimensional arrays 11 in terms of the signal/noise ratio that can be achieved. In a close packed array 11 there is no opportunity to limit the noise bandwidth until the signal has been multiplexed so the minimum noise bandwidth is the product of the frame rate and the number of pixels in a column. With a linear array 1 there is space to filter the signal from each pixel before multiplexing, which reduces the noise bandwidth and thus improves the signal/noise ratio. This may typically be achieved using compact low-power switched-capacitor filters, which can be readily implemented in CMOS technology. The array must be read out at sufficient speed that any target is sampled with sufficient resolution.

Each detector element may be made as described in WO/GB00/03243. In such a device a micro bolometer is formed as a micro-bridge in which a layer of e.g. titanium is spaced about 1 to  $2\mu\text{m}$  from a substrate surface by thin legs. Typically the titanium is about 0.1 to  $0.25\mu\text{m}$  in a range of 0.05 to  $0.3\mu\text{m}$  with a sheet resistance of about 3.3 $\Omega/\text{sq}$  in a range of 1.5 to 6 $\Omega/\text{sq}$ . The detector microbridge is supported under a layer of silicon oxide having a thickness of about  $\lambda/4$  where  $\lambda$  is the wavelength of radiation to be detected. The titanium detector absorbs incident infra red radiation (8 to  $14\mu\text{m}$  wavelength) and changes its resistance with temperature. Hence measuring the detector resistance provides a value of the incident radiation amplitude.

Figure 3 shows a schematic view of a system using four vertically arranged linear detector arrays 1a-d for use as in Figure 1; more or less arrays may also be used.

Figure 4 shows a system with four linear arrays 1a-d, as in Figure 3, marked A, B, C, D with a target object 13 moving successively through each detector beam with increasing distance away from the sensor arrays. Images 14 from each array are also shown; note that a vehicle's image becomes smaller as it moves away from the array. This allows the processor to estimate both radial movement and movement across the four arrays, i.e. calculate direction and speed of a target.

A block diagram of a processor for processing the output from a linear array is shown in Figure 5. Image from a scene is focussed onto all detectors in an array as in Figures 1, 3. Output is read sequentially from each linear array 1 via electrodes 10 into an A/D converter 16 and passed into a cpu digital processor 17. This cpu 17 carries out several steps as described later (Figures 9, 10), and also feeds into an image memory store 18, and into a communication module 19 whose output may be via landlines or radio to external receiving stations (not shown) to operators reading video monitors or to automatic detection systems.



When operated as part of a larger system, the vertical array sensor format can be optimised for use in cueing other higher resolution 2-d imagers. The timing and positional information supplied by the sensor gives an additional cue for the location of the target at a given moment in time, see Figure 7. In this case one or more vertical arrays could monitor the perimeter of the central area of interest, and a sensor format as shown in Figure 6 would be more appropriate where the vertical arrays have been constructed with a wider gap between the central pair.

The purpose of using a linear array to cue another higher resolution 2-d imager is to reduce power consumption and enable coverage of a wider area than could be achieved with the high-resolution imager operating alone. In a system like this the 2-d imager only needs to operate for short periods of time when a target has been detected. This is particularly important where it is also necessary to switch on artificial illumination in order for the 2-d array to provide a high quality image. The application of simple false alarm reduction techniques to the output of the vertical array can further reduce the number of occasions when the 2-d imager is cued. This reduction in power consumption is necessary for sustained operation of distributed sensor networks. It also allows a high-resolution imager with narrow field of view when mounted on a pan and tilt head to be cued by the processor to look at appropriate areas of interest, achieving high-resolution coverage of the area of interest within a wider field of view.

Extended coverage may be arranged by use of three or more systems. This is shown in Figure 8 which shows a plan view of four systems, as in Figures 3, 4, arranged 90° apart to give all round azimuthal coverage. Increasing the number above four improves performance at the expense of further complexity.

Figures 9 and 10 show an example of a simple digital processing sequence that could process and interpret the data from these vertical arrays. The process shown in Figure 9 outlines how movement is detected, false or spurious targets ignored and an image of the target constructed in memory for a single vertical array. The process shown in Figure 10 outlines the order in which this image would be classified, the images from all of the vertical arrays in a sensor compared, and the range, speed and directional information derived from the combined information supplied by all of the arrays.

As can be seen it is practical to implement a simple analysis of the incoming data to reduce or eliminate false targets and spurious noise and clutter in the scene. Hence movement through the scene can be detected and targets of interest validated.

- 5 Following this, further processing can classify the target and determine range, direction of movement, speed and finally an estimate of the true direction of travel.

- 10 Once in the memory 18 the image shape can be compared to stored standard templates of the typical imagery of vehicles and people as seen at the operating waveband of the detectors. In this manner the target can be classified as vehicle or personnel, and if a vehicle then the type of vehicle can be determined e.g. car, mini-van, truck, tractor, tank. The type of vehicle must be determined for the actual height of the target to be known and to enable the range, speed and directional information to be calculated.

- 15 By comparing the apparent height of the target image against the known typical height of this class of target the distance of the target from the linear arrays 1 can be calculated.

- 20 The time delay between the arrays in detecting the target and the now known distance to target can be used to calculate an estimate of the speed of the target.

- 25 As more than one vertical array is used further information can be obtained with regard to the target by tracking the target as it is detected consecutively by all of the arrays and comparing the outputs from each array against one another. For example, the direction of travel (e.g. either left-to-right or right-to-left) can be determined based on which array detects the target first.

- 30 And finally an estimate of the true direction of travel can be obtained by comparing the apparent size of the target in the images from each of the linear arrays and their relative timing.

Claims.

1. An image processing system including a linear array of detectors (1) imaged onto a scene of interest and an image store for receiving signals from the linear array  
5 when a detected object (2) passes through the scene;  
  
characterised by:  
  
a plurality of linear arrays (1a-d) spaced substantially parallel to one another to image  
10 a plurality of areas (4) of interest in a scene; and  
  
a signal processor (7, 16, 17, 18) for detecting images received by the plurality of arrays and determining direction and speed of movement detected.
  - 15 2. The system of claim 1 wherein the detectors (1) are infra red detectors.
  3. The system of claim 1 wherein the detectors (1) are visible light sensitive detectors.
  - 20 4. The system of claim 1 wherein the detectors (1) are mm wave sensitive detectors.
  4. The system of claim 1 wherein each detector element in each array (1) has associated therewith an independent amplifier and filter (9).
  - 25 5. The system of claim 1 wherein each detector array (1) has its output read out (10) sequentially from each detector element.
  6. The system of claim 1 wherein the processor (7) is arranged to determine at least one of detected object range, direction of movement, speed, true direction of travel,  
30 object type.
-

7. The system of claim 1 including an additional two-dimensional detector array system (11, 12) which may be switched on when an object (2) is detected.
8. The system of claim 1 wherein several systems are combined into a single unit  
5 arranged to give about 360° of azimuthal coverage.
8. The system of claim 1 wherein outputs from the signal processor are communicated to remote monitoring stations.
- 10 10. The system of claim 1 wherein the processor performs the algorithm of at least Figure 9 or Figure 10.

Abstract.

- An image processing system includes a plurality of vertically arranged linear arrays  
5 (1a-d) of detectors imaged onto a plurality of areas (4) in a scene of interest.  
Horizontal movement of an object (2) through the plurality of areas of interest are  
detected and fed into a processor (7). The processor may detect object range,  
direction of movement, speed, true direction of travel, object type.
- 10 The detectors may be sensitive in the infra red (IR), microwave (including mm wave  
devices), or visible wavebands, operating with ambient or artificial illumination. In  
some application a combination of IR and visible detectors may be used. Preferably  
each detector in the linear array has an associated amplifier and filter.
- 15 A 360° cover may be obtained by combining several systems into a single unit.

The system may be used to detect objects and then control operation of a higher  
definition two-dimensional detector array and camera (11, 12).

20

Figure 1 to accompany the Abstract.

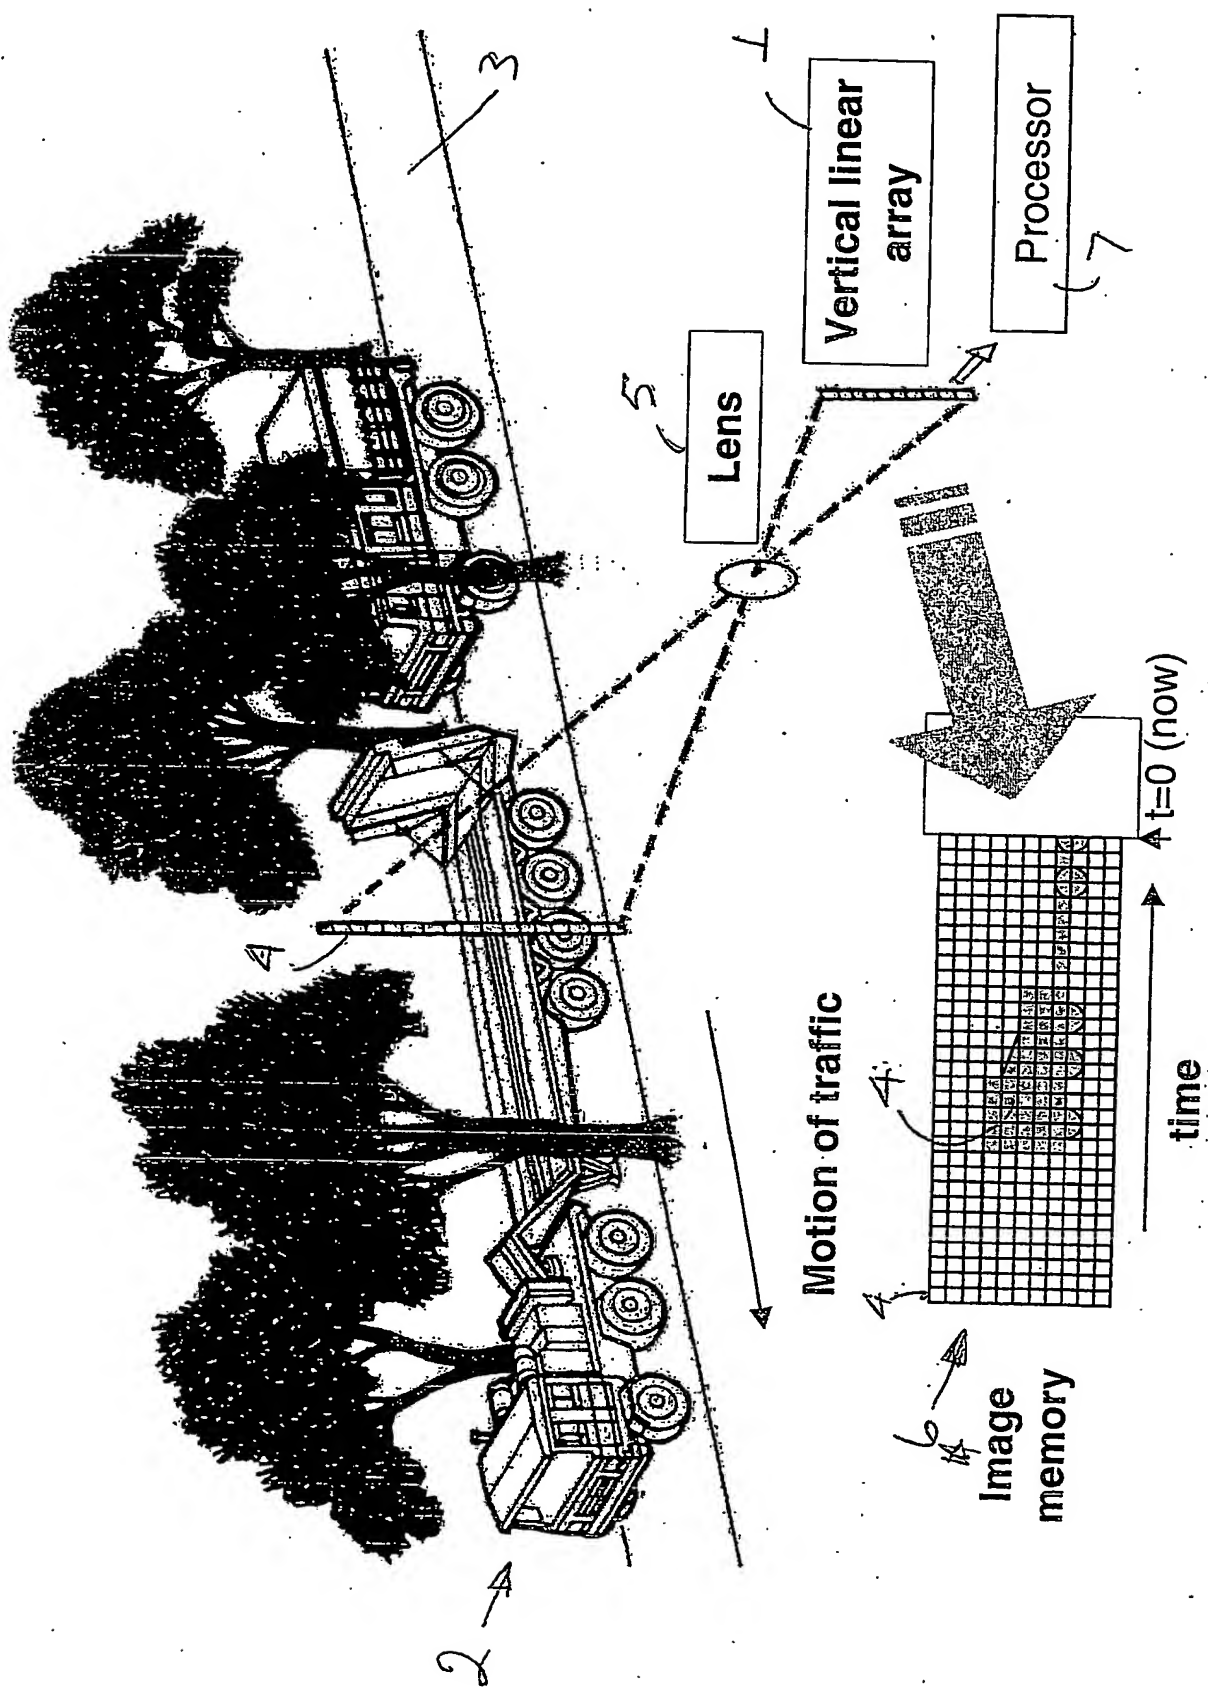


Figure 1 - illustration of the use of a single linear array imaging sensor

2/10

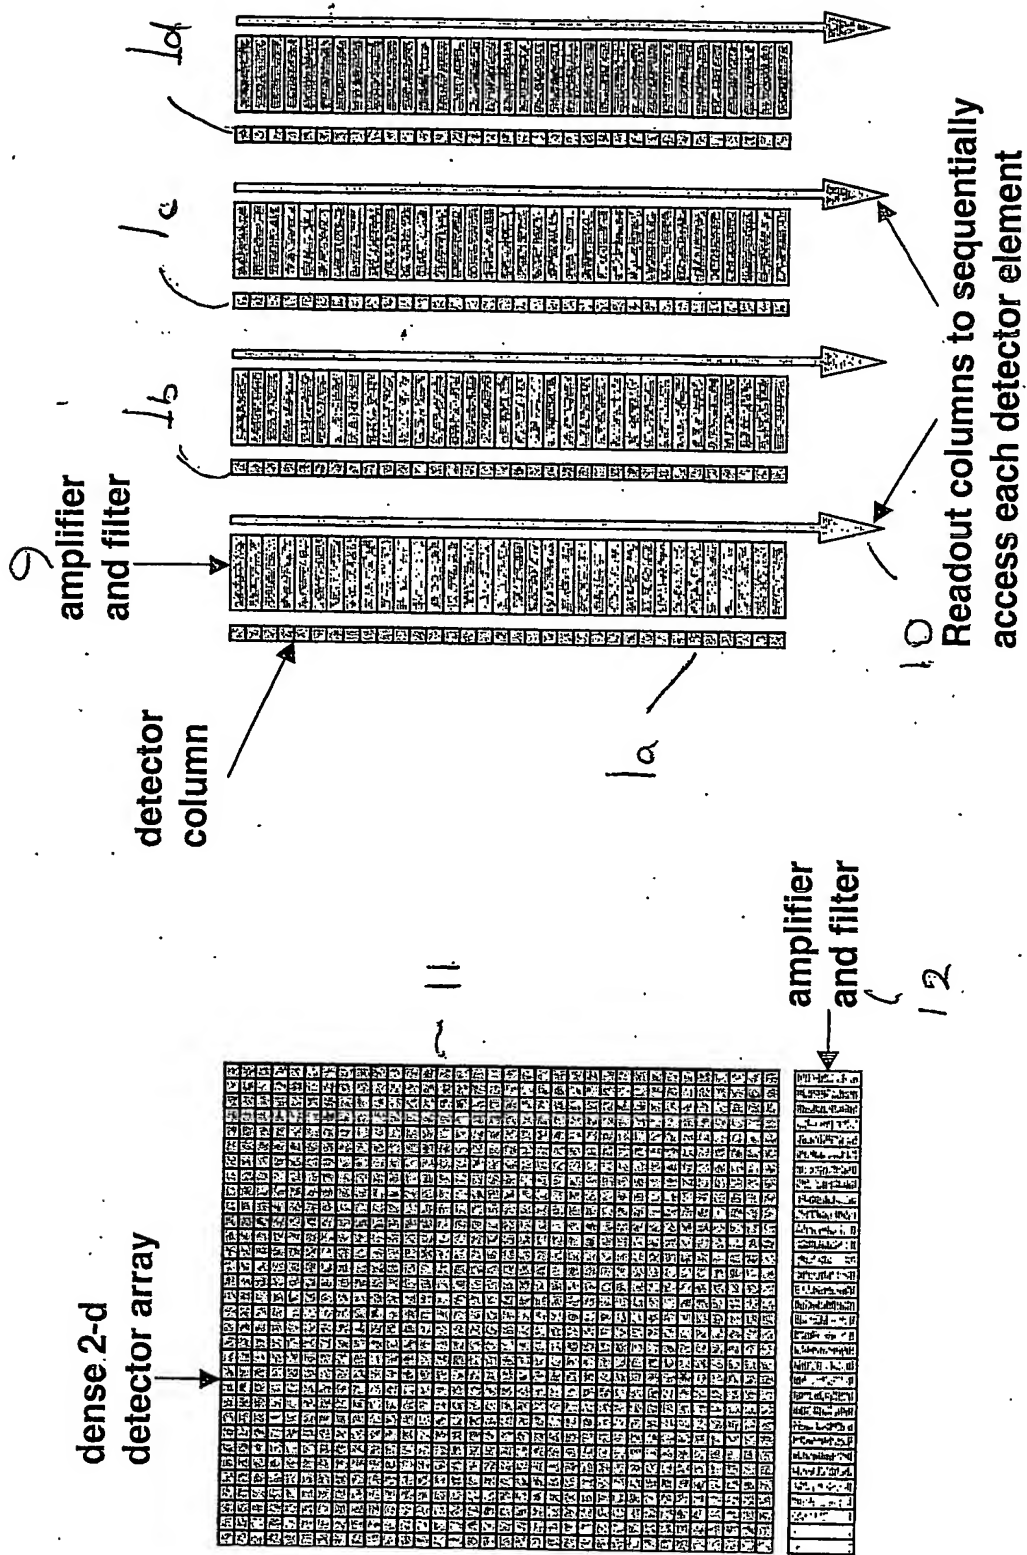


Figure 2 - comparison between close packed 2-d and vertical linear array sensor

3/10


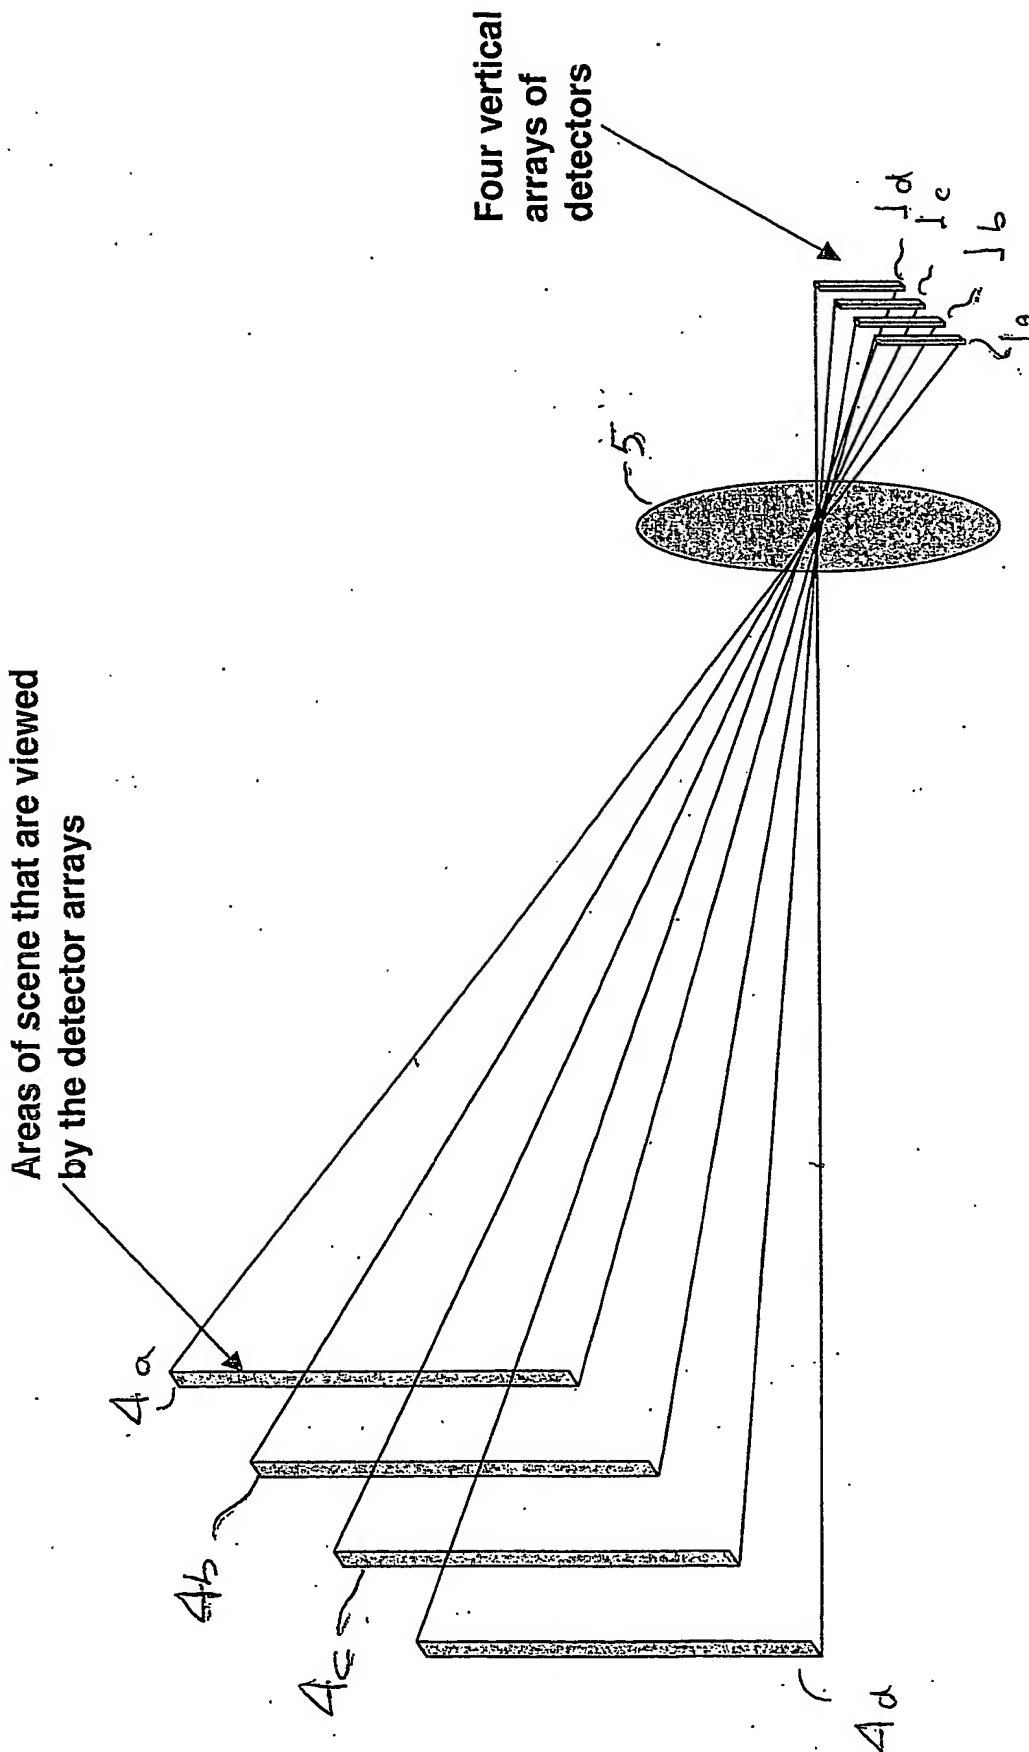


Figure 3 - schematic view of multiple linear arrays and lens




14

plan view

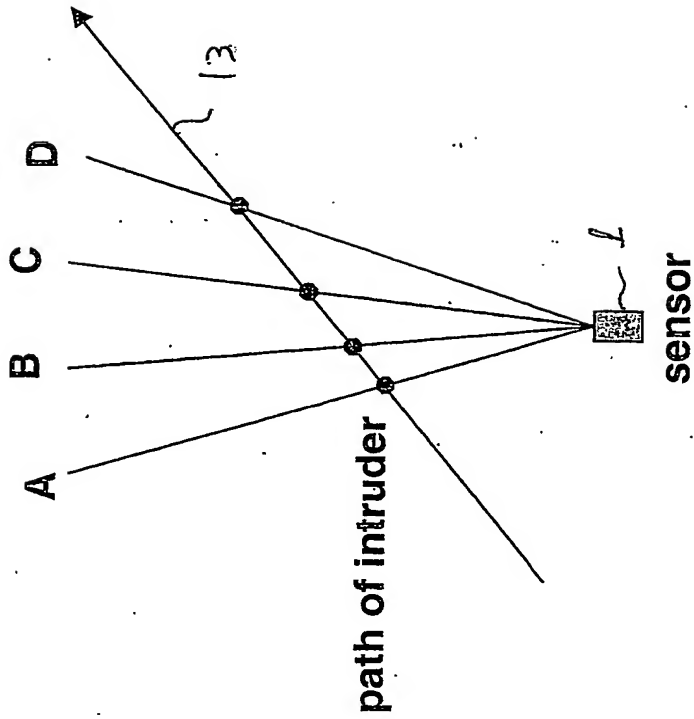

2 - Indicates a detection

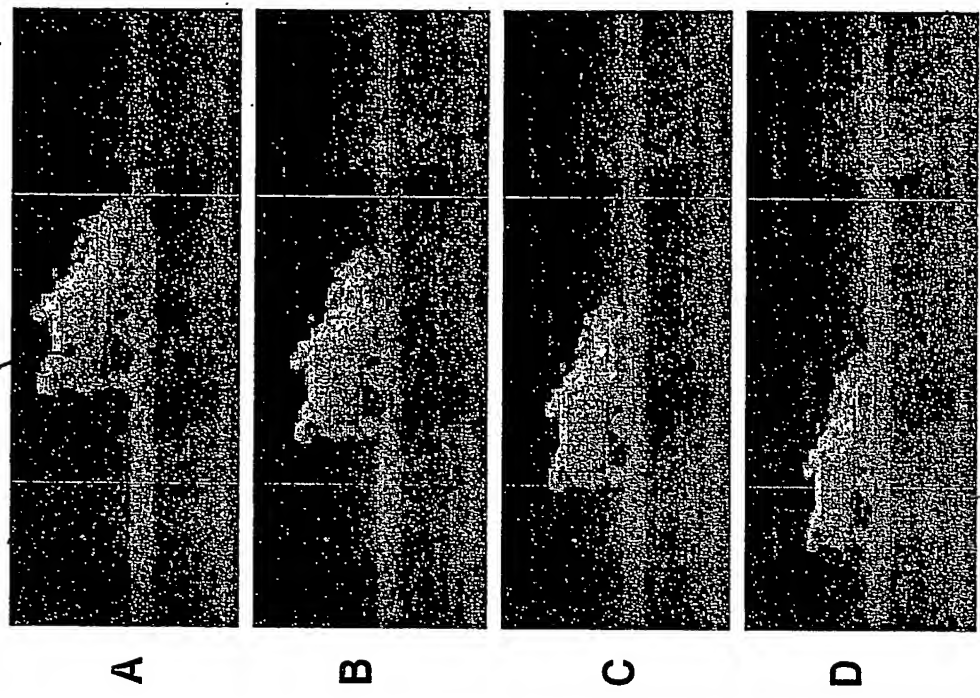

sensor images from each array

Figure 4 - illustration of the output from a multi-array sensor with detection events highlighted

5/10

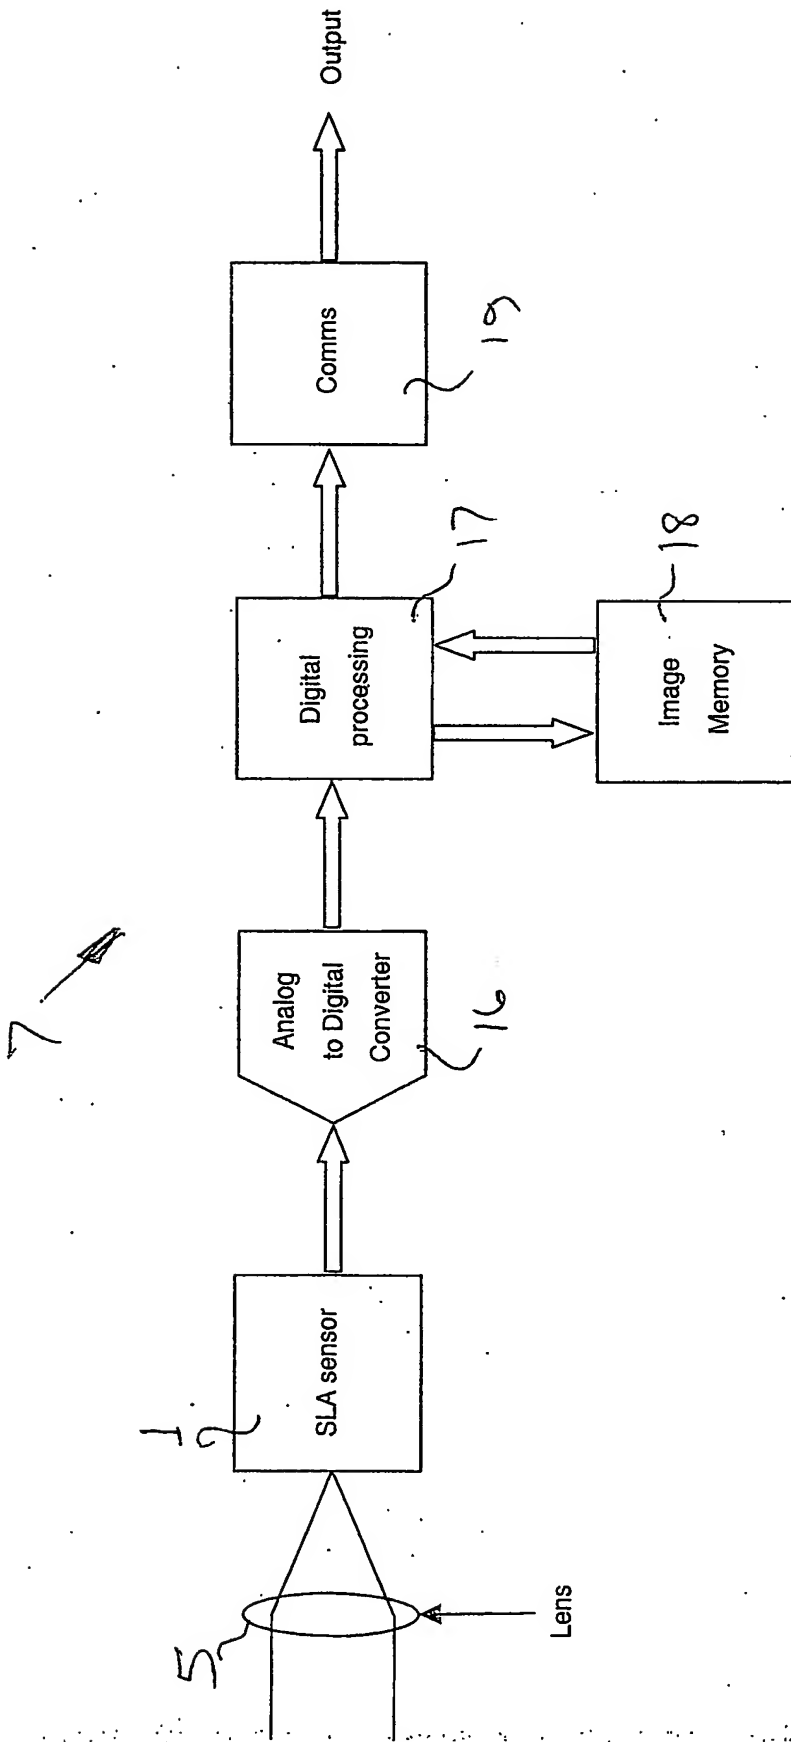


Figure 5 - outline design of system

6/10

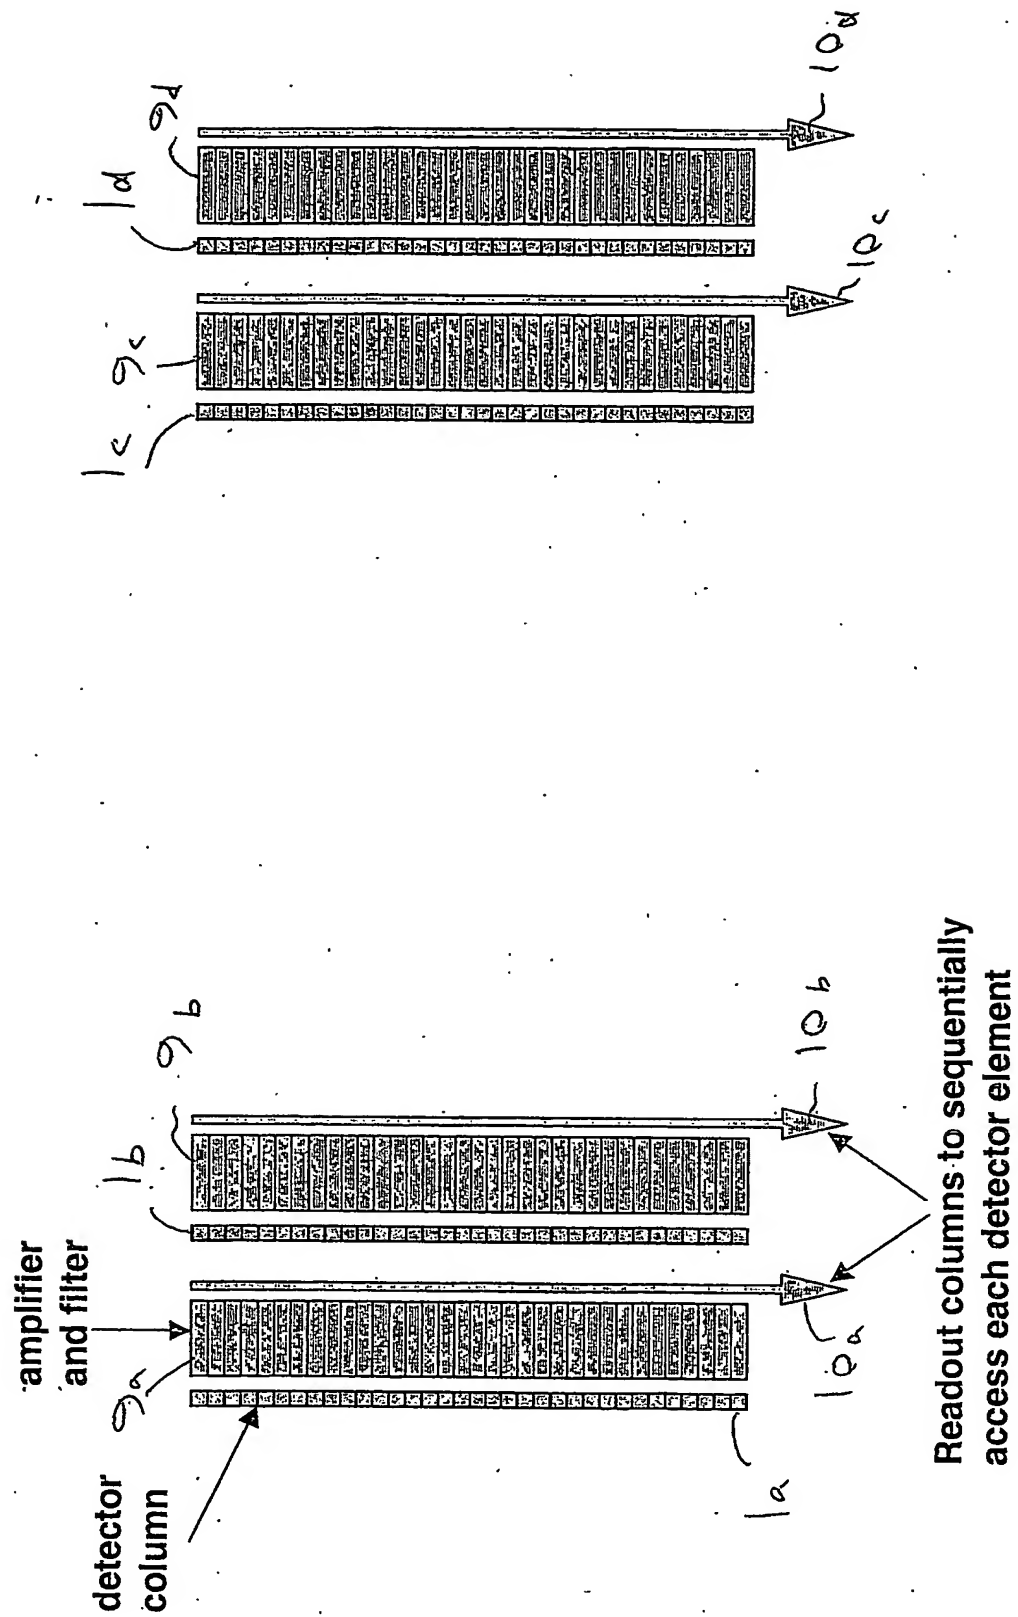


Figure 6 - Vertical linear array sensor optimised to cue a secondary 2D array

7/10

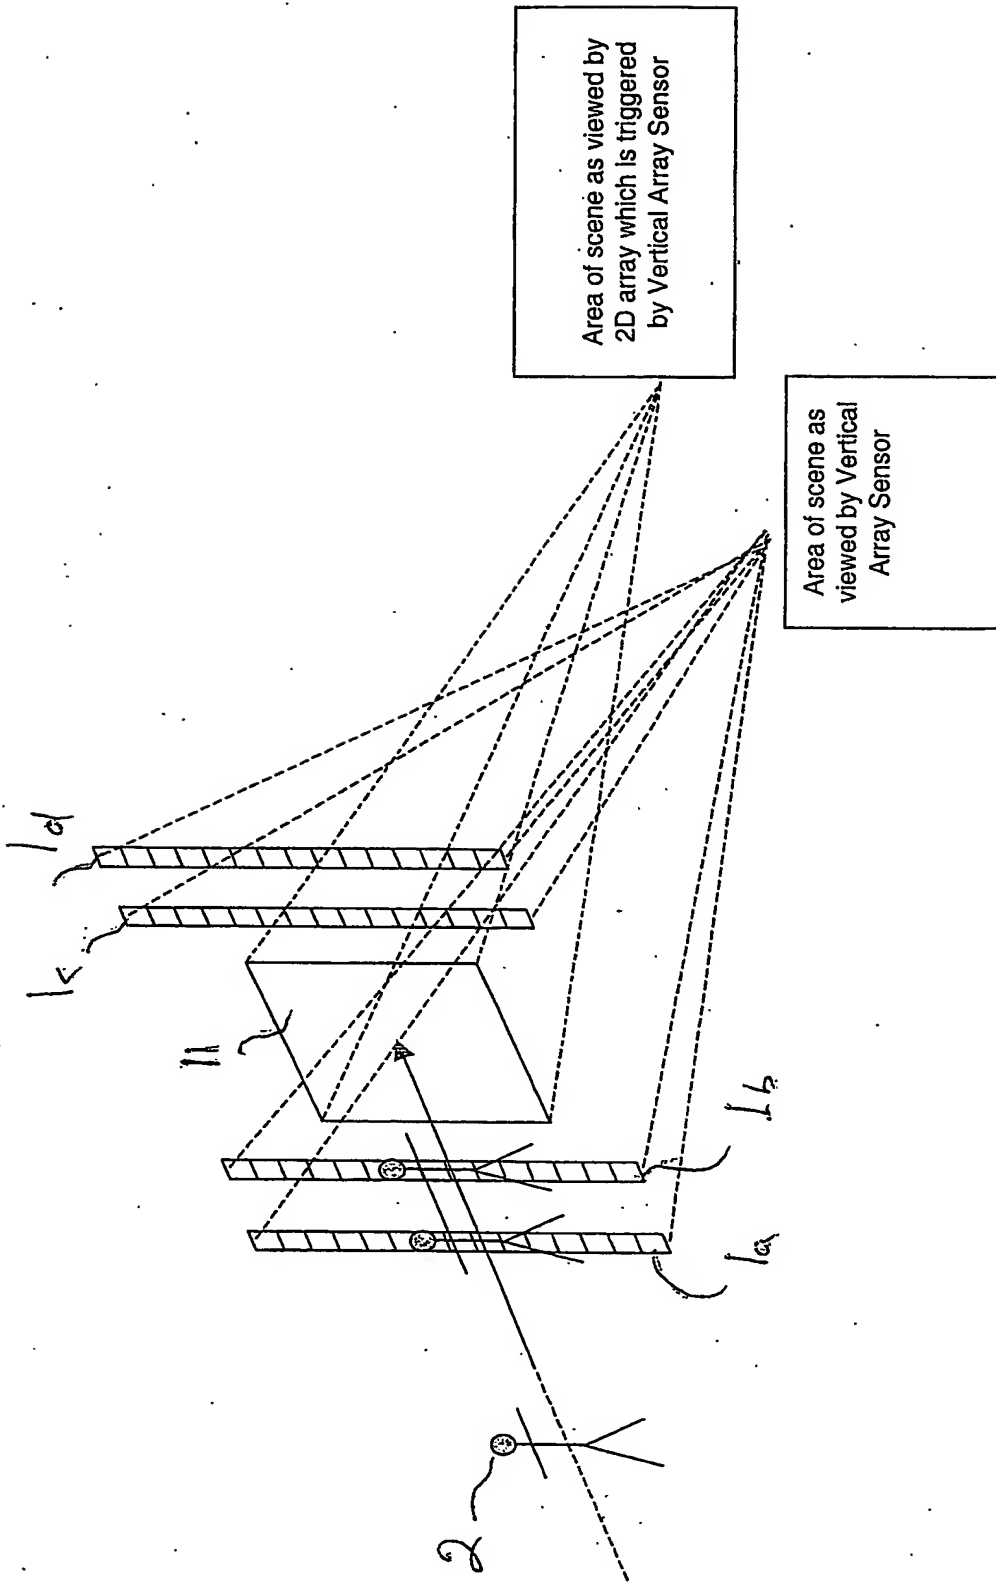


Figure 7 - Scene as viewed by Vertical linear array sensor and secondary 2D array

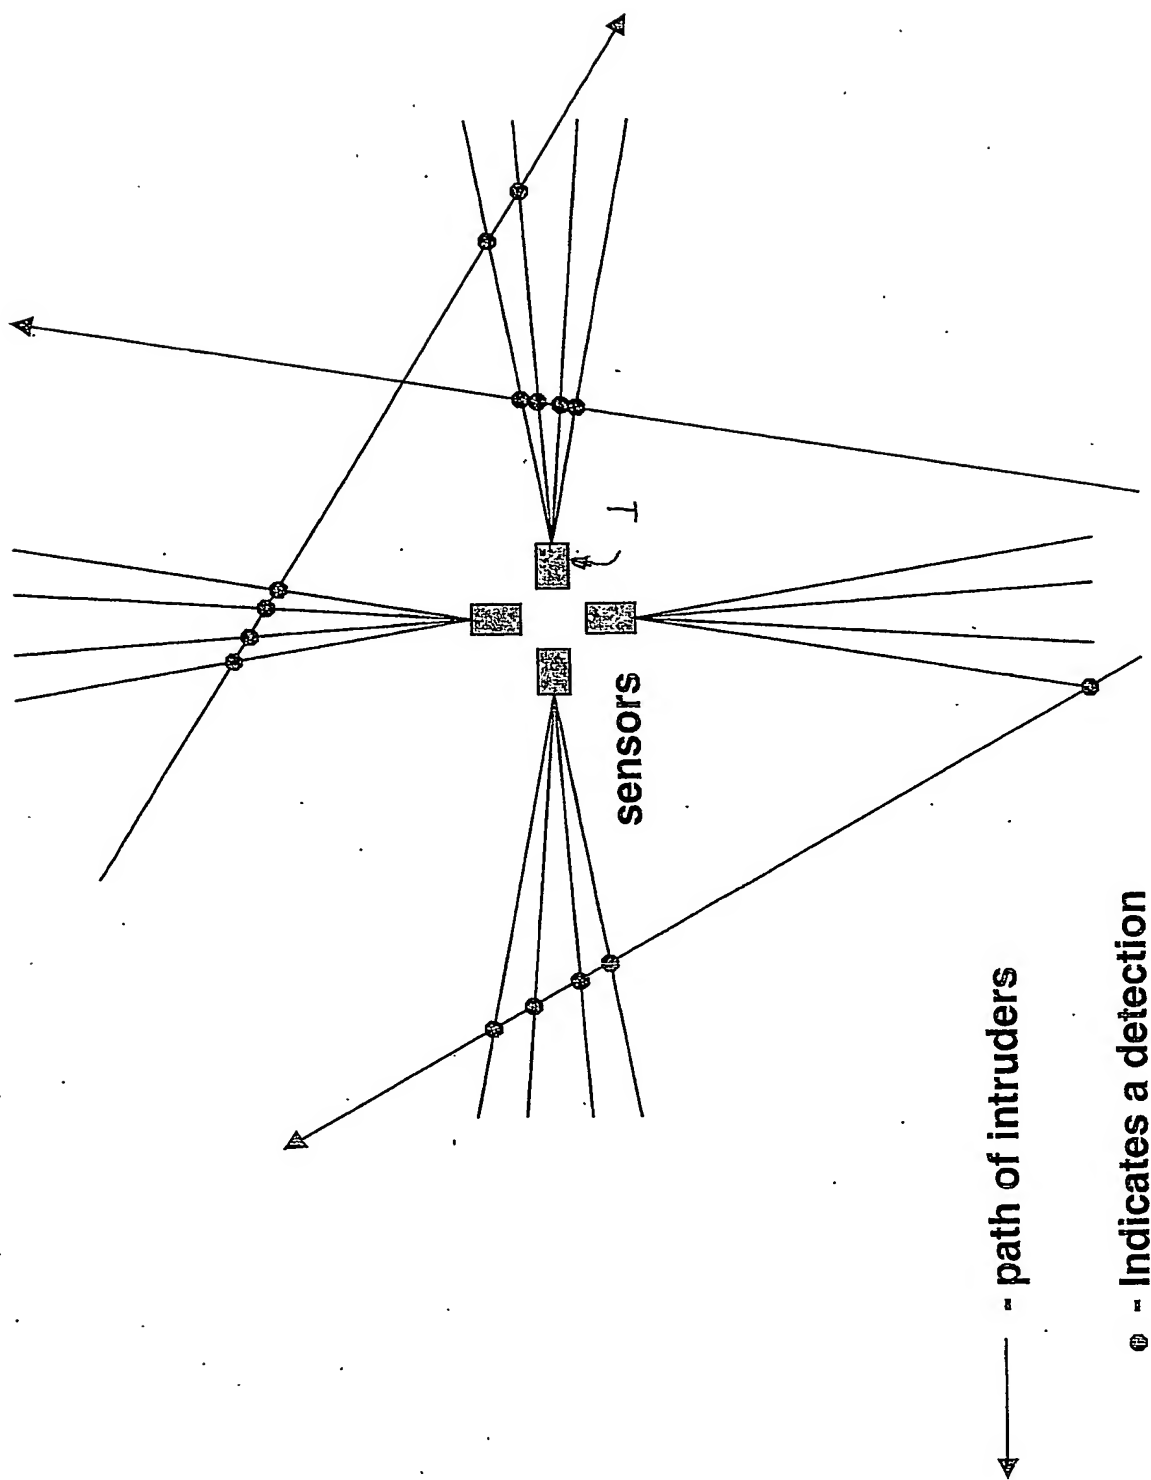


Figure 8 - Plan view of the lines of view of 4 Linear Array sensors and the points of detection of 3 intruders

9/10

Image frame from first linear array to detect target

Once validated as a genuine target, classify and identify the target image

Track the target as it is detected consecutively by all of the arrays and compare the output of all arrays. Thus calculate range, speed and approximate direction of travel

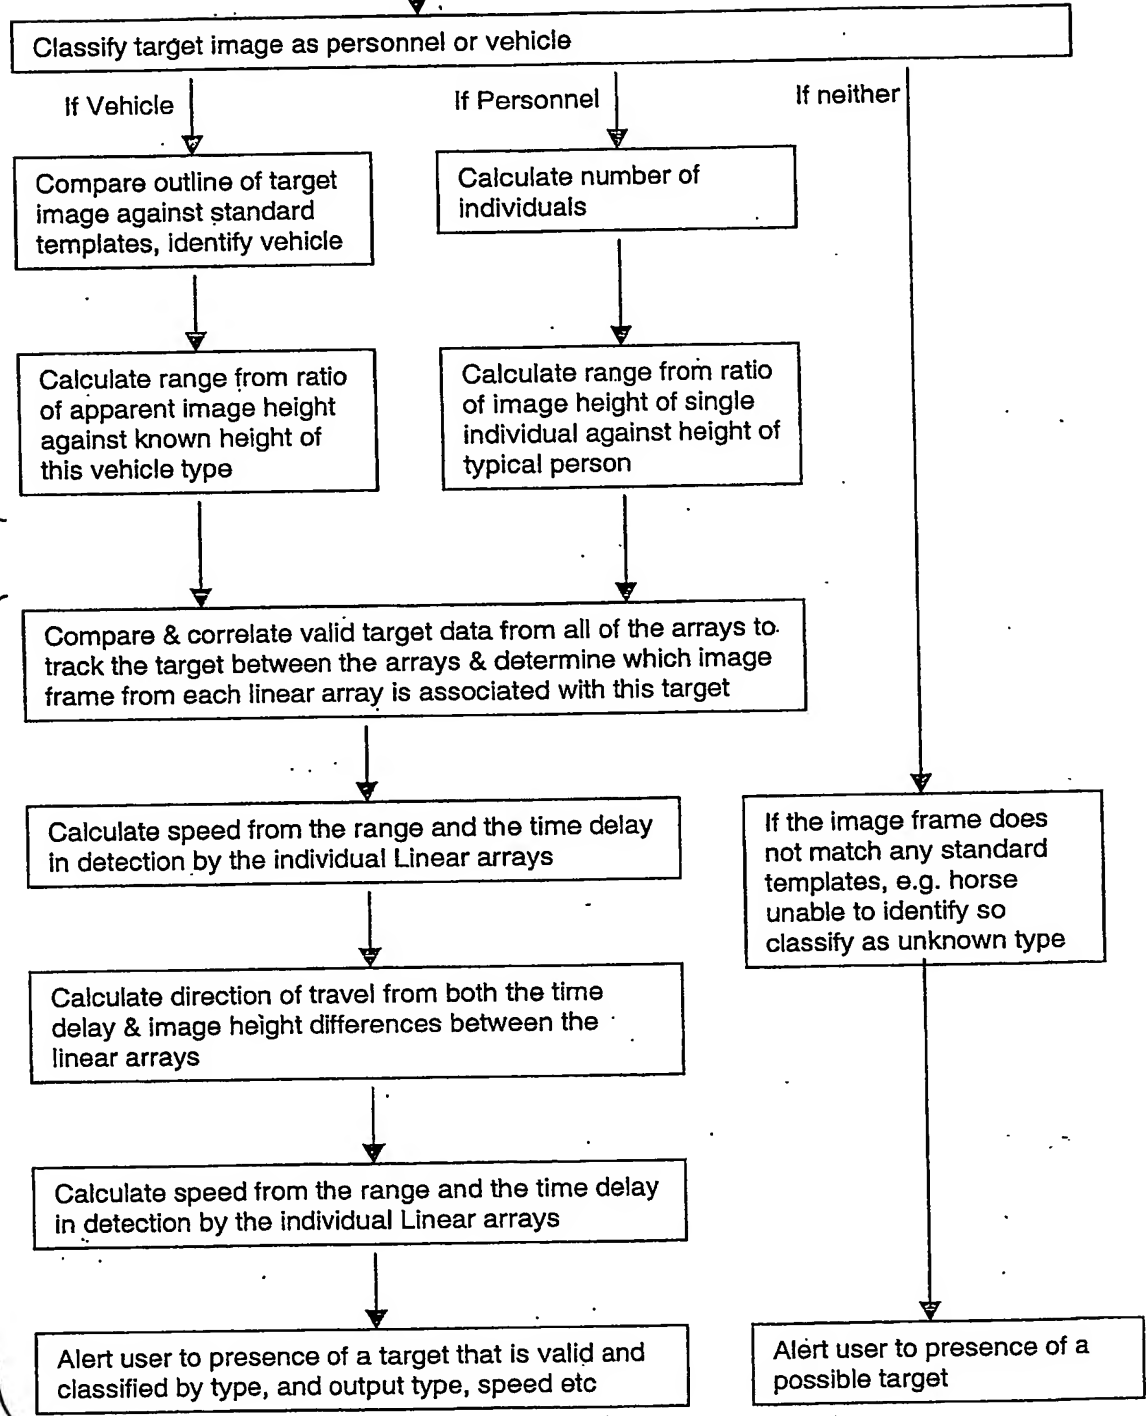


Figure 10 - Flow chart of Digital Processing for Automatic Target validation

10/10


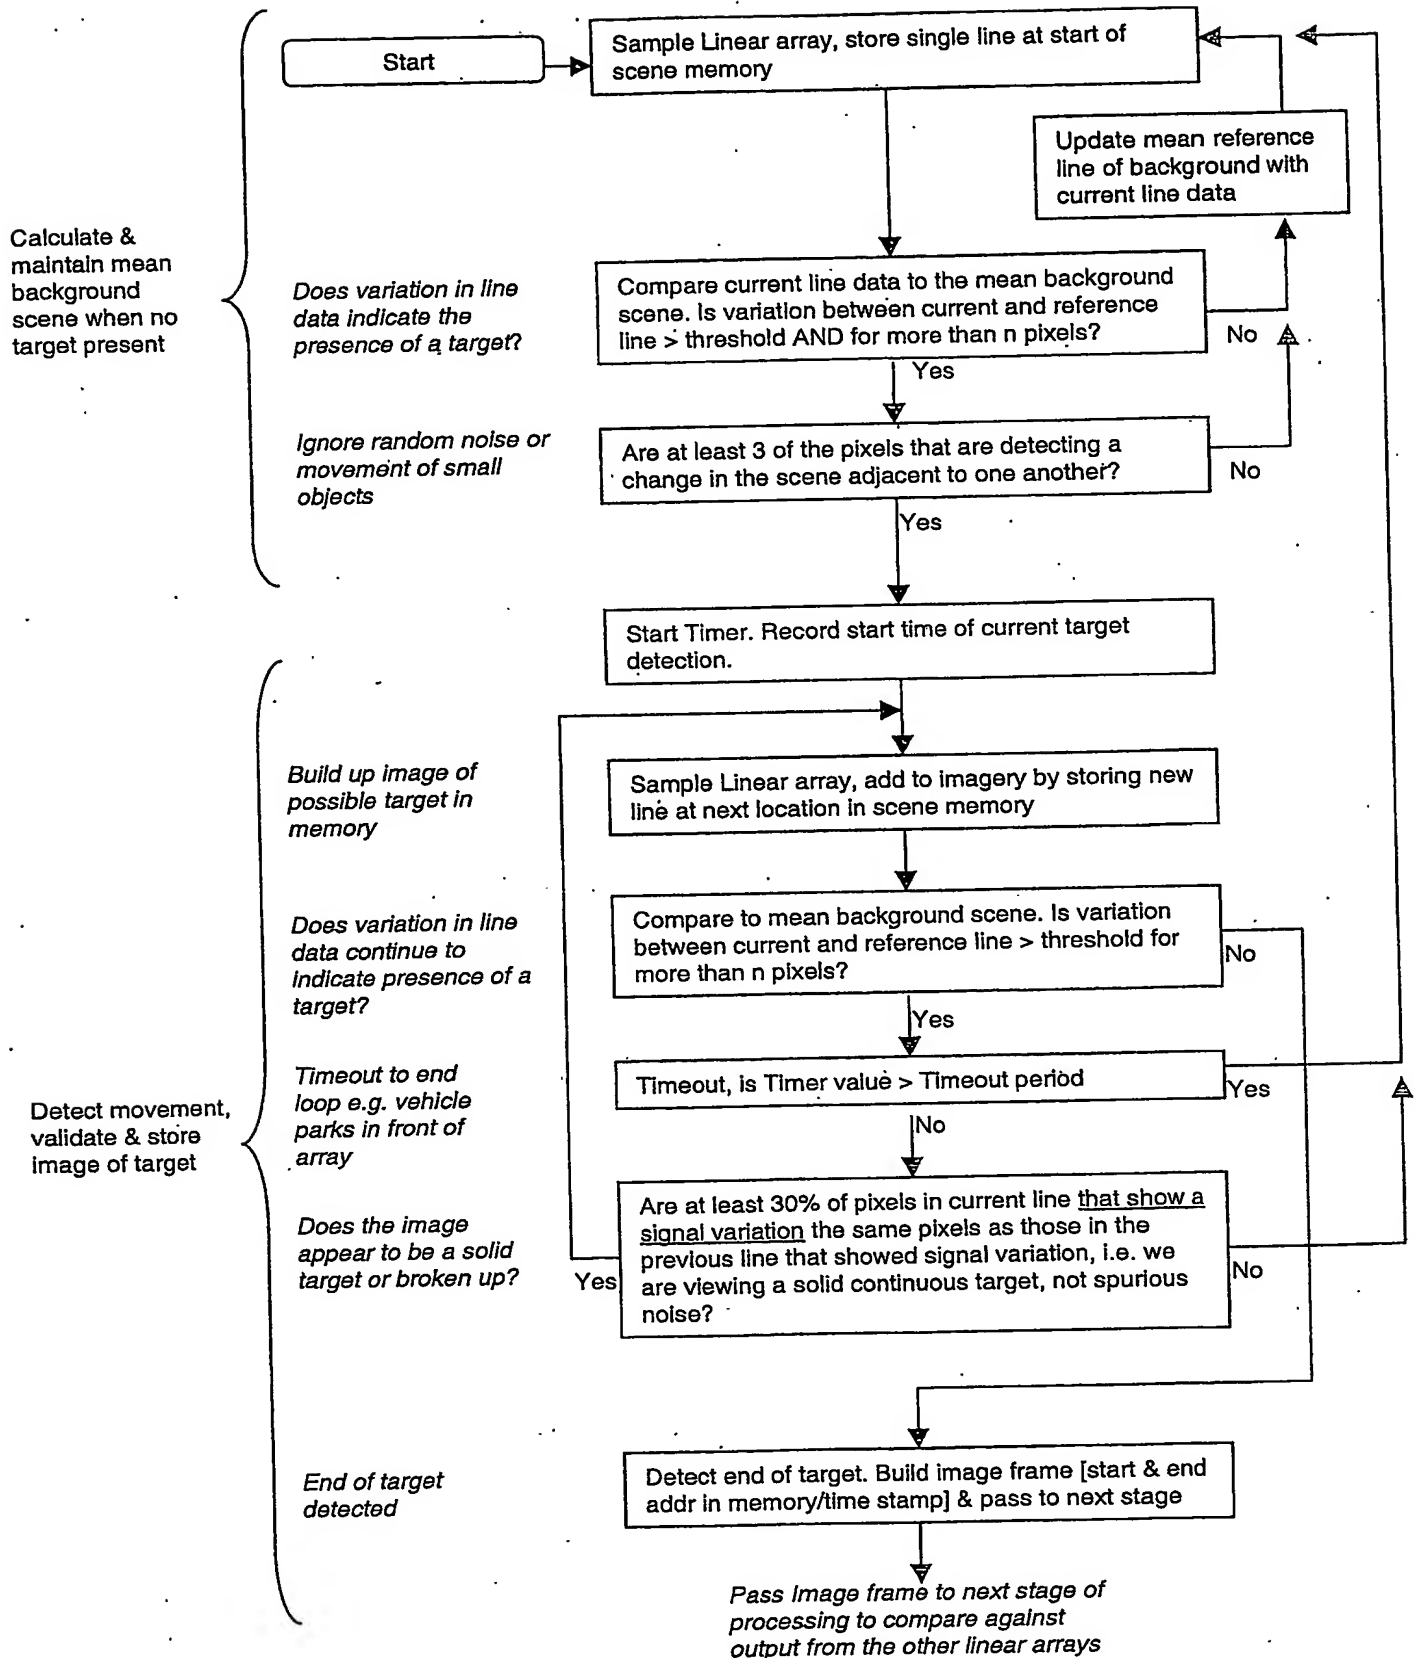


Figure 9 - Flow chart of Digital Processing For a Single Linear Array

**PCT/GB2004/002676**



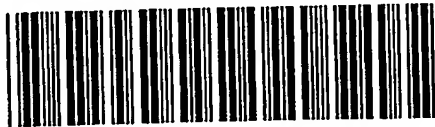

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**